

LIGHT EQUIPMENT PORTFOLIO

A collection of Dynapac construction equipment, including a large roller, a smaller roller, a vibratory plate, a vibratory tamper, a vibratory screed, and a vibratory finisher, all in white and red.



LIGHT EQUIPMENT

PERFECT HELPER FOR EVERY SURFACE



The Dynapac Light Equipment range compliments our larger compaction & paving equipment to get the job done in relatively confined spaces. We focus on every possible type of material to compact, through weight classes and different types of machines. Combined with Dynapac's decades of experience in the world of compaction & paving, this incredible range of equipment will ensure that you stay ahead of the game.

Here, you discover more about the walk-behind equipment from Dynapac. Rammers, forward and reversible vibratory plates, twin drum roller and the utility roller – a fantastic range of equipment that is Designed to Perform. Built to Last!

APPLICATIONS

Landscaping and gardening
Construction pre compactions
Trench works and earthworks
Asphalt works and repairs



FORWARD PLATES

DFP SERIES



OPERATOR COMFORT

LOW HAV HANDLES

Comfort operation all day with low Hand Arm Vibration (HAV) levels on standard handles (<5 m/s²). The levels are further lowered with the use of optional comfort handles.

ONE POINT LIFT

Provides ease of equipment loading or unloading on jobsite with a forklift or other machinery.

TRANSPORT WHEELS

As option further simplifies the moment of the machine in the jobsite.



BUILT TOUGH

ENGINE PROTECTION FRAME

Equipment is designed to withstand workplace abuse with safeguarding the engine from heavy material falls and potential accidents but also easy and convenient access for regular checks and maintenance.

V-BELT PROTECTION COVER

Around the V-belt offers protection against dust and weather conditions maximizing the service life of the V-belt and the other components.

DRIVE UNITS

Both Honda gasoline and Hatz diesel come with proven reliability, performance and simplified maintenance.



PRODUCTIVITY

WEAR RESISTANT BOTTOM PLATE

Purpose built and designed cast iron bottom plates to handle all kind of material.

WATER SPRINKLER SYSTEM

Settles dust and prevents material sticking on the bottom plate in asphalt application delivering optimum results.

SYNTHETIC MATS

Easy add on synthetic mats for block paving application.



LOW HAV HANDLE

ONE POINT LIFT

PROTECTION FRAME

WATER
SPRINKLER
SYSTEM

V-BELT PROTECTION



FORWARD PLATES

DFP7AX

ASPHALT SPECIAL

SPECIAL BASE-PLATE DESIGN

The tapered edges for making swift turns without leaving any marks.

SPRINKLER SYSTEM

The top spray with flow-controlled sprinkler system guarantees that no material adheres to the plate.

QUICK RELEASE TANK

The quick dismount of water tank ensures easy refills in between work. The level indicator on the tank further assists the operator in keep a check on the water level.

THE ASPHALT MAESTRO

The weight, frequency and amplitude are optimized for the right finish on asphalt.



SPECIAL BASE PLATE DESIGN



FORWARD PLATE SPECIALS D.ROUND

RIGHT SIZE, RIGHT FORCE

Optimum width and right compaction force ensuring non damaged optic cables during the operation.

HIGH MANEUVERABILITY

Special design handle ensure easy steering of the machine with easy U-turn possibility.

BUILT TOUGH

All round engine protection with V-belt protection.

EASE OF MOVEMENT

Single point lift placing the machine in and out of the trenches and also for transport.



FORWARD PLATES

DFP SERIES



		DFP5X	DFP6	DFP7	DFP8
OPERATING MASS	kg	52	65	72	83
OPERATING WIDTH	mm	300	350	400	360
CENTRIFUGAL FORCE	kN	9	10	12	10
ENGINE MODEL		Honda GXR120	Honda GX120	Honda GX120	Honda GX120
EQUIPMENT ACCESSORIES					
WATER TANK, DETACHABLE, TOP SPRINKLER (13.5L)			<input type="radio"/>	<input type="radio"/>	
WATER TANK, DETACHABLE, BOTTOM SPRINKLER (6L,7L)			<input type="radio"/>		<input type="radio"/>
WATER TANK, FIXED, BOTTOM SPRINKLER (11L)					
COMFORT HANDLE, HAV < 2.5 m/s ²				<input type="radio"/>	<input type="radio"/>
COMFORT HANDLE, HAV < 2.5 m/s ² , CENTER MOUNT					
COMFORT HANDLE, HAV < 3.2 m/s ² , ERGO GRIP					
TRANSPORT WHEELS					<input type="radio"/>
SYNTHETIC MATS		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>





DFP8X	DFP9	DFP9X	DFP10D	DFP11	DFP12D	DFP7AX	D.ROUND
90	91	94	104	108	122	82	88
430	450	500	450	500	500	500	430
15	18	19	18	25	25	12	14
Honda GX160	Honda GX160	Honda GX160	Hatz 1B20	Honda GX160	Hatz 1B20	Honda GX120	Honda GX160
				○	○	Standard	
	○		○				
○		○					
	○		○	○	○	○	
				○	○	○	
○		○					
○	○	○	○	○	○	○	
○	○	○	○	○	○	○	○

WATER TANK
(6L,7L)



WATER TANK
(11L)



COMFORT HANDLE,
ERGO GRIP

APPLICATIONS

Landscaping and gardening
Heavy construction pre compactions
Earthworks and road works
Asphalt works and repairs



REVERSIBLE PLATES

DRP SERIES



OPERATOR COMFORT

LOW HAV HANDLES

Ensures comfortable operation and with reduced Hand Arm Vibration (HAV) values longer working hours are permitted.

REVERSE DRIVE PROTECTION

The operator is always safe from the machine running over when operating in reverse.

ONE POINT LIFT

Ease of equipment loading or unloading on jobsite with a forklift or other machinery.

E-START

Easy and effortless starting process. The machine is also equipped with back up recoil starters as standard.



EASY MAINTENANCE

SELF-CLEANING BASE PLATE

Open-style construction base-plate prevents the stones from getting stuck, thus reducing the wear & tear.

SWING OPEN HOOD

Conveniently provides complete access to daily and period maintenance components of the equipment simplified and easy periodic maintenance to avoid unwanted downtime.

HOURLY METER

Helps to track usage of equipment, making it easier to keep schedule maintenance to keep them running efficiently.

AUTO BELT TENSIONER

No periodic checks required for tensioning the belt.

ACCESS POCKETS

Provides easy access to all daily check and maintenance points of the equipment.



HIGH QUALITY

DYNAPAC COMPACTION INDICATOR (DCI)

An active measuring system to indicate the compaction progress. The system shows the compaction level on a light display providing the operator conclusion on compacted material thus avoiding unnecessary passes.



EXTENSION PLATES

Easily adaptable to the requirement of the job without having to invest on completely new machine.



BUILT TOUGH

ALL-AROUND PROTECTION HOOD

Keeps the equipment safe and sound under rough conditions including accidental hits from a forklift or wheel loader.

V-BELT PROTECTION

In addition to the protection hood V-belt has its own cover that keeps the belt protected from dust and dirt ensuring maximised lifetime.

ALL-AROUND
PROTECTION HOOD

ONE POINT LIFT

LOW HAV HANDLE

LOCKABLE
HANDLE TYPE



REVERSIBLE PLATES


DRP SERIES



		DRP15X	DRP15D	DRP15DX	DRP20	DRP20D
OPERATING MASS	kg	140	150	155	205	210
OPERATING WIDTH	mm	500	400	200	600	420
CENTRIFUGAL FORCE	kN	25	25	25	35	35
ENGINE MODEL		Honda GX160	Hatz 1B20	Hatz 1B20	Honda GX160	Hatz 1B20
EQUIPMENT ACCESSORIES						
EXTENSION PLATES (50 mm, 150 mm)						
HOUR METER					○	
E-START						
TRANSPORT WHEELS		○	○	○	○	○
WATER TANK, (12L)		○	○	○		
SYNTHETIC MATS		○	○	○	○	○



EASE OF SERVICE

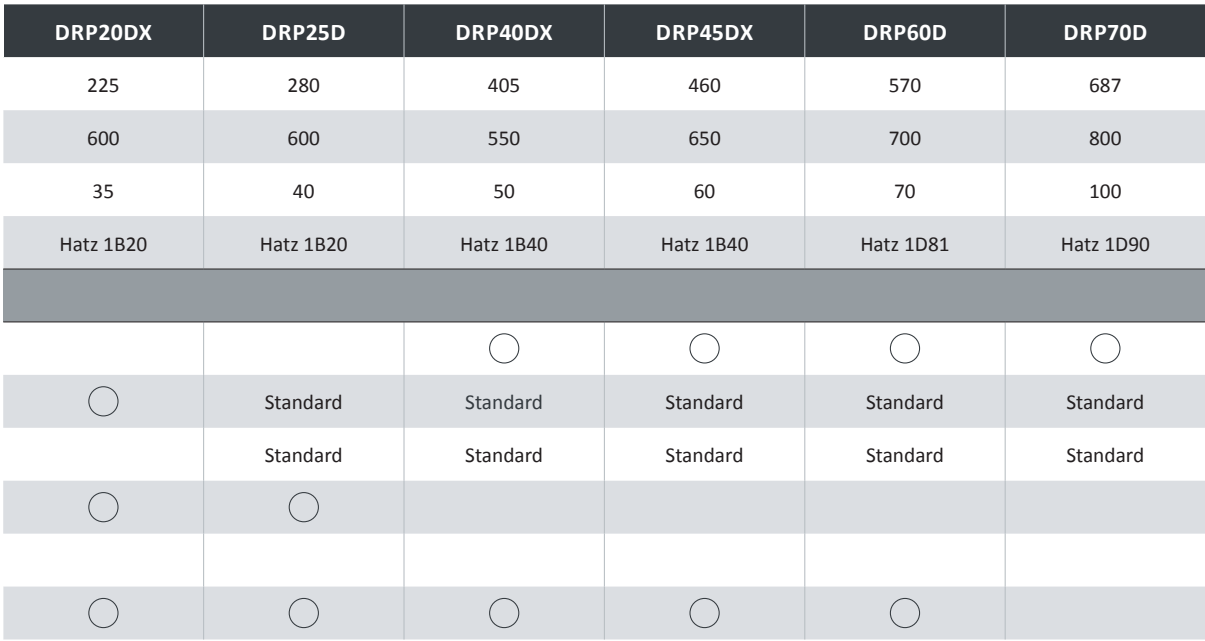

APPLICATIONS

Landscaping and gardening
Heavy construction pre compactions
Earthworks and road works
Asphalt works and repairs



REVERSIBLE PLATES

DRQ SERIES



OPERATOR COMFORT

LOW HAV HANDLES

Ensures comfortable operation and with reduced Hand Arm vibration (HAV) values longer working hours are permitted.

REVERSE DRIVE PROTECTION

The operator is always safe from the machine running over when operating in reverse.

LOCKABLE HANDLES

Locking foldable handle reduces the overall length of the machine and the locking mechanism holds it there during transport.

ONE POINT LIFT

Easy loading or unloading on jobsite with a forklift or other machinery. The equipment is also equipped with tie down points for safe transport.



BUILT TOUGH

HARDOX BOTTOM PLATE

Can withstand abrasive material in soil during compaction making it less prone to wear and damages.

SELF-CLEANING BASE PLATE

Open-style construction base-plate prevents the stones from getting stuck, thus reducing the wear & tear.

V-BELT PROTECTION

The V-belt cover keeps the belt protected all time from dust and dirt ensuring maximised lifetime.



EASY MAINTAINENCE

SEMI OPEN FRAME

Not only ensures protection from material fall over but also allows more access to daily maintenance and serviceable components.

BUILT IN BELT TENSIONER

Makes belt tensioning process simple and quick.

ACCESS POCKETS

Provides easy access to all daily check and maintenance points of the equipment.



		DRQ15	DRQ25	DRQ30	DRQ35
OPERATING MASS	kg	165	240	282	337
OPERATING WIDTH	mm	400/450	500	550	600
CENTRIFUGAL FORCE	kN	32	38	40	55
ENGINE MODEL		Honda GX200	Honda GX200	Honda GX270	Honda GX390
EQUIPMENT ACCESSORIES					
SYNTHETIC MATS		○	○	○	

APPLICATIONS

Landscaping and pipework
Confined space compactions
Trench works and earthworks
Asphalt repair and patch works



RAMMER DR SERIES



OPERATOR COMFORT

LOW HAV HANDLES

Low vibration levels ensure comfortable operation and reduced Hand arm vibration (HAV) values allows stress free working all day. DR6X also has the lowest HAV in its class with vibration less than 5m/s^2 .

HEIGHT ADJUSTABLE HANDLE

Provides a high & low setting with a difference of 10cm / 4in based on the operator requirement.

MULTIFUNCTIONAL KNOB

The knob controls both fuel supply and engine stop function. The operator does not have to worry about forgetting to switch the fuel supply off after switching off the rammer.

CASTOR WHEELS WITH VERTICALLY ORIENTED GRIP

Provides easy movement of rammer and also minimizes strain on the arm by providing an easy lift.

ONE POINT LIFT

Provides ease of equipment loading or unloading on jobsite with a forklift or other machinery.

TRANSPORT WHEELS

Puncture proof wheels with easy mounting for ease of transport.



LOW MAINTAINENCE AND DOWNTIME

SELF CLEANING HOUSING

Prevents dust build up around the prefilter making it more efficient and also ensures the longer life on the engine filter that lasts a full season.

HOURLY METER

Helps to track usage of equipment, making it easier to keep schedule maintenance and service to keep them running efficiently. The hour meter also doubles as RPM meter with low RPM indication.

LOW OIL INDICATOR

Avoids bad surprises with engine breakdown, ensuring engine is not started with low oil levels.

SWAPPABLE FOOT TYPES

Meets different application requirement with different foot types and widths. The foot can be easily swapped by removing just four bolts.



BUILT TOUGH

DUAL STAGE AIRFILTER

The engine running efficient without breakdowns with dual stage air filtration even in toughest work environment

ALL ROUND PROTECTION




The rammer can withstand a fall from any side or material falling over it. The engine also is protected from all sides, avoiding breakdowns due to transport and rough handling.

HONDA GXR

The engine is built for a rammer application to meet the high demands. The rammer can be transported horizontally and crank up promptly without the need for extensive setup, saving valuable time.



RAMMER DR SERIES

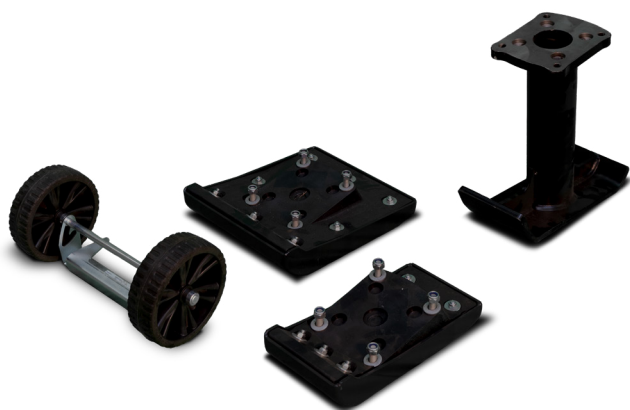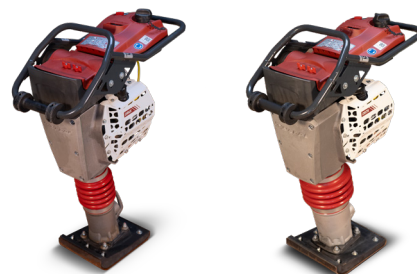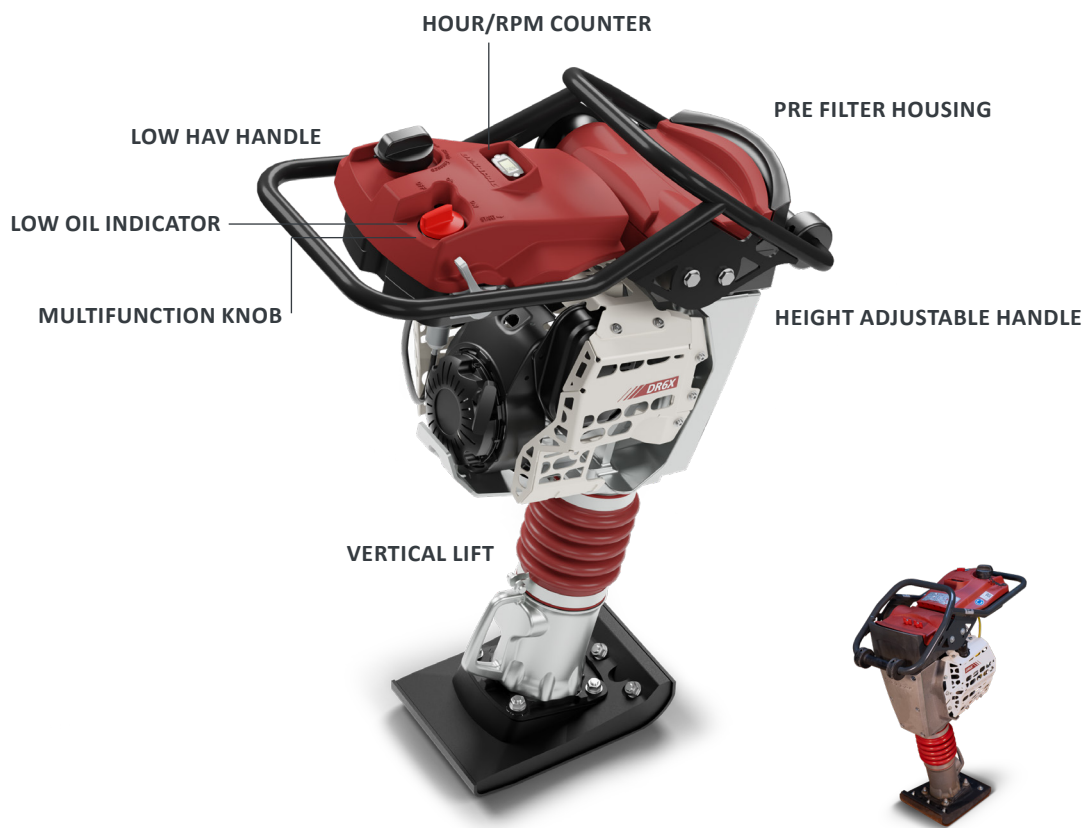

		DR6X	DR7X
OPERATING MASS	kg	58	68
OPERATING WIDTH	mm	230	280
CENTRIFUGAL FORCE	kN	15.0	17.0
ENGINE MODEL		Honda GXR 120	Honda GXR 120
EQUIPMENT ACCESSORIES			
TRANSPORT WHEELS		<input type="radio"/>	<input type="radio"/>
FOOT WIDTHS		<input type="radio"/>	<input type="radio"/>
FOOT EXTENSIONS		<input type="radio"/>	<input type="radio"/>



APPLICATIONS

City and rural roads
Cycle paths and footpaths
Asphalt repair works
Earth works



TWIN DRUM ROLLER

DTR SERIES



OPERATOR COMFORT

ANTI-CRUSH MECHANISM

On the operator handle and a parking brake ensures a safe operating environment.

LOW VIBRATION HANDLE

Minimizes operator fatigue and allow long hours of stress-free operation easily.

E-START

Easy and effortless starting process. The machine is also equipped with back up recoil starter as standard.

LOCKABLE HANDLES

Locking foldable handle reduces the overall length of the machine and the locking mechanism holds it there during transport.



EASY MAINTAINENCE

EASY SERVICE ACCESS

All service point can be readily reached for routine maintenance, thereby minimizing both service duration and downtime hours.

HOURLY METER

Help to track usage of equipment, making it easier to keep schedule maintenance and service to keep them running efficiently.



HIGH QUALITY

DUAL AMPLITUDE

The dual-amplitude oscillator effectively meets the job specifications, delivering both high-quality results by achieving depth with high amplitude and ensuring a smooth finish with low amplitude.

HYDROSTATIC DRIVEN DRUMS

The hydrostatic drive ensures smooth start/stop with precise speed control and delivers high operating and transport speed with high gradeability.



PRODUCTIVITY

MINIMUM FRAME OVERHANG

Makes compaction possible very close to the wall. The ground clearance also allows compaction along the curb.

ADJUSTABLE SCRAPPERS

Each drum is equipped with scrappers which constantly clean up the drum surface to get the best compaction results. The scrappers are also easily accessible for cleaning with minimum effort.

LARGE WATER TANK OF 60L

Makes it more practical and can be used for relatively longer periods without having to re-fill. The water flow can be regulated based on the compacted material and also drained easily to avoid frosting.



BUILT TOUGH

ALL ROUND PROTECTION

The roller can withstand material fall over it and accidental damages from other machines due to the protection frame and the all round metal protection.



		DTR75	DTR75D
OPERATING MASS	kg	720	740
OPERATING WIDTH	mm	650	650
MAX. FORWARD SPEED	km/h	5.9	5.9
MAX. REVERSE SPEED	km/h	2.5	2.5
CENTRIFUGAL FORCE	kN	25/13	25/13
ENGINE MODEL		Honda GX 390	KohlerK D15-440

APPLICATIONS

Trench compaction
Soil compaction
Foundation compaction

UTILITY ROLLER D.ONE



MAXIMUM UPTIME

ON BOARD DIAGNOSTICS

Ensures fast trouble shooting of a problem and gets the machine back to work mode in no time.

STRONG HOOD

Built tough to avoid damages from handle material falling over or equipment top over.

LONG BATTERY LIFE

The battery life of 40hrs ensures a complete work week of stress free operation to the operator. Alternatively, the machine can still be operated connected to cable if required.

AUTO ENGINE STOP

Prevents engine breakdown by shutting it down at a lateral angle more than 45°.



HIGH QUALITY

AUTOMATIC VIBRATION CONTROL (AVC)

A feature that regulates the speed and vibration, the trench roller ensures excellent results in cohesive soil.

DUAL AMPLITUDE

Two separate vibrations are available based on the requirement. The AVC works in combination to deliver superior compaction quality with a choice of high and low amplitude vibration depending on the required compaction levels.

DYNAPAC COMPACTION INDICATOR (DCI)

Is an active measuring system to indicate the operator on the compaction progress and avoids unnecessary passes. The system shows the compaction level on a light display providing the operator conclusion on compacted material.

ARTICULATED STEERING

This feature enhanced maneuverability in tight spaces and improves traction on uneven terrain, with increased stability for compaction.



MAXIMUM ROI

DETACHABLE DRUM EXTENSIONS

As a standard feature that let's you use the same equipment in tighter spaces and trenches.

SMOOTH DRUM

Attachment gives you the flexibility to take up special jobs without investing on completely new equipment.



STAY CONNECTED

RADIO FREQUENCY REMOTE

The radio-controlled remote technology is not sensitive to weather conditions and can work trouble free in conditions with extreme sunlight. Thus, you can focus on the compaction job rather than struggling to stay connected even in deep trenches with shoring.

ALL OPERATIONS ON REMOTE

All the machine functions including engine start-stop can be activated from the remote control eliminating the hassle of walking down the trench to re-start the equipment.



OPERATOR COMFORT

ACTIVE ZONE SYSTEM (AZS)

Stops the equipment if it gets too close to the operator. Unintentional or accidental operation of other equipment in the vicinity is avoided by the fool-proof remote-control technology.



SAVINGS

ECOMODE

Operation keeps the diesel costs in check by regulating the engine speed.

MAINTENANCE FREE JOINT

Save on the time and effort of applying grease multiple times a day.






DYNAPAC COMPACTION INDICATOR



ON BOARD DIAGNOSTICS




ECO MODE




ACTIVE SAFE ZONE




UTILITY ROLLER D.ONE

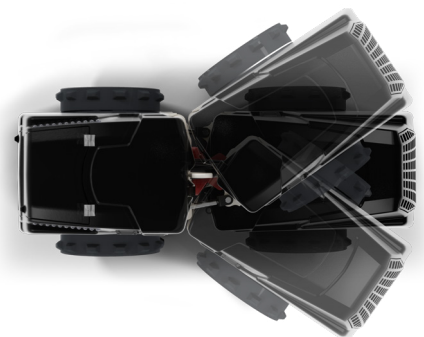

ARTICULATED STEERING

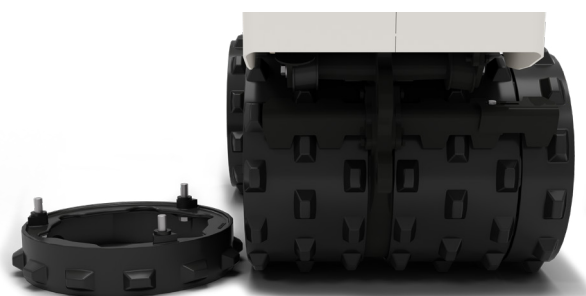

REMOVABLE EXTENSIONS

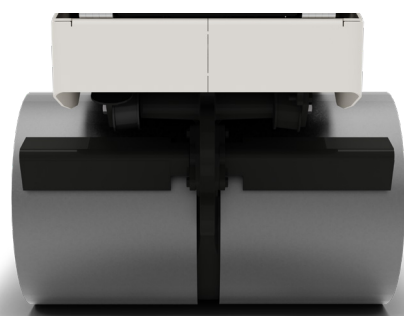

SMOOTH DRUM



ADJUSTABLE SCRAPER

D.ONE

OPERATING MASS	kg	1595
OPERATING WIDTH	mm	850/610
MAX. OPERATING SPEED	km/h	1.2
MAX. TRANSPORT SPEED	km/h	2.8
CENTRIFUGAL FORCE	kN	72/36
ENGINE MODEL		Kohler KDW 1003
OPTIONS		
ADJUSTABLE SCRAPPERS		
PORTABLE CHARGER & BATTERY		
SMOOTH DRUM		

APPLICATIONS

Pipeline and trench work
Car parks and garages
Patch works and small road
Walkways and bike paths



MINI PAVER F80W



OPERATOR COMFORT

SIMPLE AND USER FRIENDLY CONTROLS

Easy to learn and simple dashboard layout. Always stay in control with easily reachable dashboard layout.

LOW TURNING RADIUS

Maneuver easily in tight spaces with the three-wheel construction with 1m turning radius.

ASSISTED FUNCTIONS

Stress-free and comfortable operation with hydraulic screed extension, auto conveyor & auger control.

E-START

Easy and effortless starting process. The machine is also comes equipped with back up recoil starters as standard.



HIGH PRODUCTIVITY

VARIABLE SCREED EXTENSION

Effortlessly adjust to varying paving widths through the hydraulic extension of the screed.

SCREED AND AUGER EXTENSION

Simple add on installation of extensions for screed and auger to accommodate wider paving projects.

COPYING ROLLERS

Simply follow the predefined profile of the road to lay the new mat of asphalt. The option saves time with no requirement to adjust the screed height during the job.

TWIN REAR WHEEL

Provides that extra traction for demanding jobsites.



MAXIMUM ROI

COMPACT SIZE

The low height and length of the machine makes it an ideal choice for tight space application like underground parking garages. The compact size also makes it very easy for transport.

LESS TIME TO SET UP

The machine can be easily unloaded and set up quickly for a jobsite. The propane gas heating also helps in fast heat up of screed.

ERROR DIAGNOSTICS SYSTEM

Fast trouble shooting with machine diagnostics with error codes. This helps in keeping the downtime low by reducing the service time.

F80W

OPERATING MASS	kg	1150
OPERATING WIDTH	mm	800-1650
MAX. OPERATING SPEED	km/h	25
MAX. TRANSPORT SPEED	km/h	5
MAT THICKNESS	mm	5-100
THEORITICAL CAPACITY	t/h	35
ENGINE MODEL		Hatz 1B40

OPTIONS

COPYING ROLLER

HOPPER FILLING HELP

MECHANICAL EXTENSION 2 X 175 mm

AUGER LED LIGHT

TWIN REAR WHEELS

FRONT WHEEL SCRAPER



S100 MIX SPREADER



OPERATOR COMFORT

MUSCULAR SKELETAL DISORDER

Avoids musculoskeletal injuries and problems, including strains and sprains, muscle and joint pains, broken bones because by excessive and long hours of muscle effort force

SELF PROPELLED

The two wheel drive system takes all the load and makes it easy to move during operation & from point to point. The castor wheel on the rear makes it easy to handle tight maneuvers.

SIMPLE CONTROLS

The equipment's controls are all reachable easily by the operator making it very easy and simple to operate.



HIGH PRODUCTIVITY

VARIOUS APPLICATION

The equipment can be used for spreading different material like asphalt, sand, gravel.

MAT AND PROFILE CONTROL

The height of the screed and the profile can be easily adjusted by the operator depending on the requirement of the job.

ADJUSTABLE HATCHES

The hatches which can be independently opened or closed as required by the job.

S100		
LOADED MASS	kg	720
OPERATING WIDTH	mm	250-1000
HOPPER CAPACITY	l	150
SPREAD HEIGHT	mm	100
HATCHES		4
DRIVE UNIT		Honda GXV 160



PICK 'N SPRAY EMULSION SPRAYER



OPERATOR COMFORT

ALL IN ONE MODULE

The emulsion tank including all components of the spray system including the engine and hydraulics are built into one compact module that can be easily installed on pickup truck, mini truck or tractor.

IN CAB CONTROLS

The complete spray system can be operated from inside the cab including separated nozzle control for various spray application and fine end adjustments.

QUICK SET UP

Emulsion can be loaded in under 15 minutes. The spray bars are quickly unfolded for spraying during spray mode.

APPLICATION MODE

The emulsion can be sprayed using the spray bar or using hand lance depending on the requirement



HIGH QUALITY

HOMOGENUOUS MIX

The emulsion is always maintained at the optimum temperature for spraying using automated temperature control heating unit in combination with the tank insulation and continuous circulation.

PRECISE SPRAY RATE

The emulsion flow rate is controlled using a pump which provides operator precise control over the spray rate.

DROP LESS PURGE

Compressed air pushes back the emulsion back to the tank without even a drop of emulsion falling on the ground.

PICK 'N SPRAY		
LOADED MASS	kg	1200
OPERATING WIDTH	mm	2400
TANK CAPACITY	l	600
MAX SPRAY SPEED	km/h	5
SPRAY RATE	g/m ³	100-500
NOZZLES	units	12
DRIVE UNIT		Honda GX200

Pick-up truck is not included!





FOR AN EMISSION FREE WORLD

Z.ERA

EMISSION FREE WORKPLACE

The Z.ERA program at Danypac is helping accelerate our continual push towards an emission-free workplace

LOWER OPERATING COSTS

Among the many benefits of alternative energy-powered plates compared to their diesel-powered counterparts are a lower carbon footprint, more savings from lower operating costs, and less wear and tear from fewer fluids and moving parts.



SUSTAINABILITY



- Emission-free at point of use; no more exhaust fumes
- Reduced wastage and consumables compared to conventional engines

OPERATOR COMFORT



- Safe and healthy without exhaust fumes
- Effortless start/stop with the battery drive
- Tool-less and quickly swappable battery
- Low HAV level handle

MAXIMUM UPTIME



- Recharge the Li-ion batteries with portable charging possibility
- Battery charge status & error indicators
- All-around fall protection for battery and motor

HIGH PRODUCTIVITY



- Uncompromised power with the high-performance electric motor
- Multiple options and accessories to meet different jobsite requirement

LOW COST OF OWNERSHIP



- Maintenance free electric motor
- No air and fuel filters to be maintained
- Fail-safe electric drive with error indication



FOR AN EMISSION FREE WORLD



		DFP5X e	DFP8X e	DFP9X e
OPERATING WEIGHT WITH BATTERY	kg	52	98.5	102
OPERATING WIDTH	mm	300	430	500
CENTRIFUGAL FORCE	kN	9	15	15
MOTOR TYPE/ELECTRIC PLATFORM		IPM Motor	Honda eGX	Honda eGX
BATTERY CAPACITY	Wh	1000	740	740
RUNTIME APPROXIMATE	mins	60	35	35
CHARGE TIME FULL APPROXIMATE	mins	120	90	90

EQUIPMENT ACCESSORIES				
WATER TANK, FIXED, 13.5L			<input type="radio"/>	<input type="radio"/>
SYNTHETIC MAT		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
BATTERY		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
CHARGER		<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

		DR6X e
OPERATING WEIGHT WITH BATTERY	kg	71
OPERATING WIDTH	mm	230
CENTRIFUGAL FORCE	kN	15
ELECTRIC PLATFORM		Batteryone
RUNTIME APPROXIMATE		
BATTERYONE BOB10	mins	30
CHARGE TIME APPROXIMATE		120
BATTERYONE BOC13	mins	50
BATTERYONE BOC7	mins	90

EQUIPMENT ACCESSORIES		
TRANSPORT WHEEL PUNCTURE PROOF		<input type="radio"/>
FOOT WIDTHS		<input type="radio"/>
BATTERY		<input type="radio"/>
CHARGER		<input type="radio"/>





CONTACT US

FOR MORE INFORMATIONS

WANT TO FIND OUT MORE?

Go to Dynapac Product Information
and scan the QR code to enter the
product site.

